

# UNISORB®


INSTALLATION TECHNOLOGIES

## PRODUCT DATA

BOX 1000, JACKSON, MI 49204-1000  
517-764-6060 • FAX 517-764-5607

BULLETIN NO.  
GB-0098-1.1

# LEVEL-RITE® MACHINERY MOUNTS FOR HOLLOW BASE MACHINES

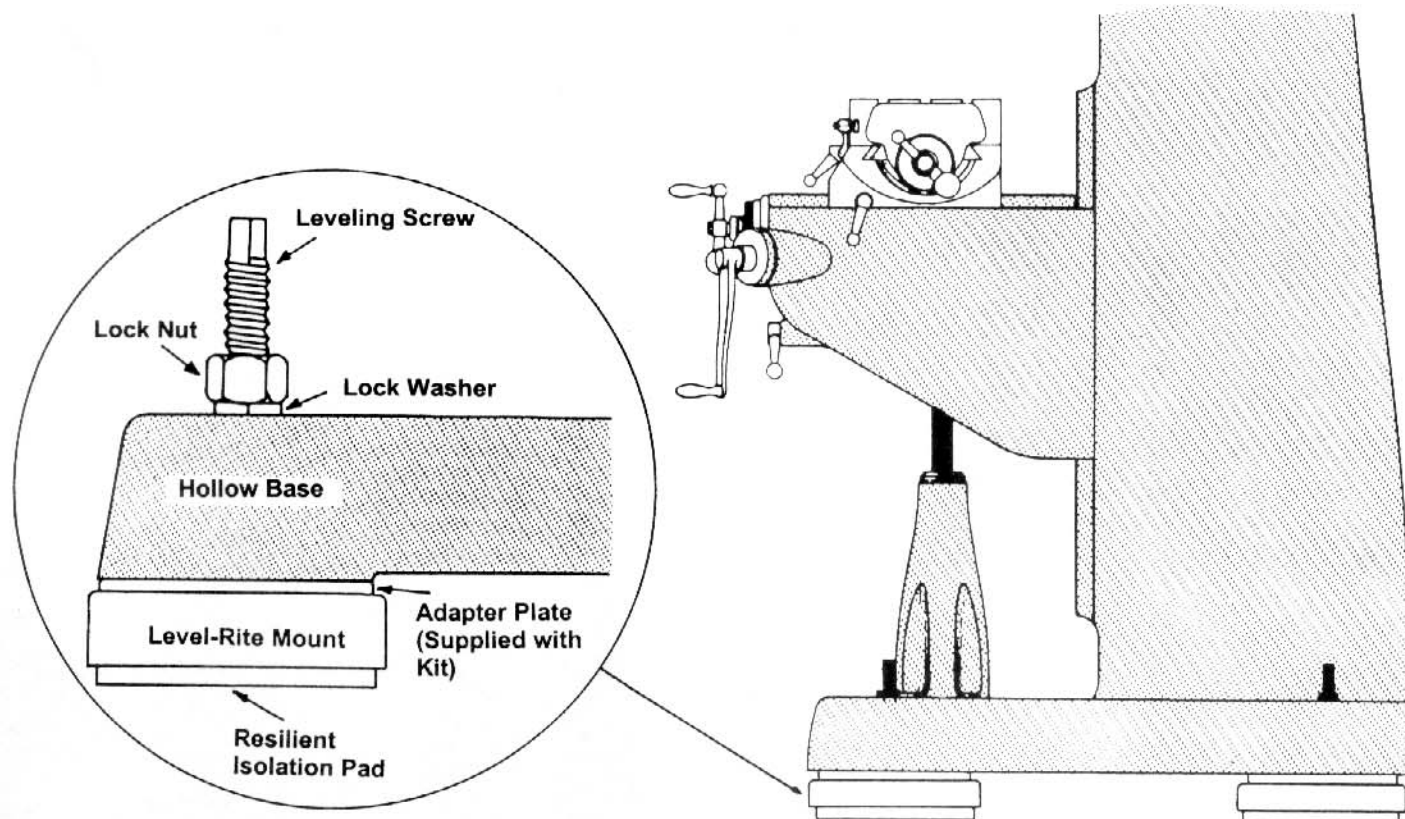

- Patented molded elastomeric vibration isolation pads
- Full 1 3/8" adjustment range provides accurate leveling & coolant flow on worst case floor conditions.
- Includes (2) adapter plates to span width of base for optimum support
- Mounts elevate machine base for cleaning and maintenance access
- Value added investment for the life of your machine
- Ease of portability

Designed for hollow bases as found on certain models of mills, lathes, grinders and other machines. Provides vibration control, leveling and support.

Kit includes mounts with special length adjusting screws and adapter plates. Specify distance between bolt holes when ordering. Standard kits accommodate these distances:

BP-2500 KIT	19.25" - 20.75"
BP-5000 KIT	23.25" - 24.75"
BP-5000S KIT	25.25" - 26.75"

Other spacings are available on request.

Accurate leveling is obtained by simply turning the leveling screw. Free-floating action of the leveling screw automatically compensates for uneven or pitched floors. Once adjusted, the lock washer and nut hold the adjustment secure. Furnished complete with Elastomeric pads, BP-2500 and BP-5000 Series Level-Rite Mounts absorb vibration, reduce noise, and prevent machines from creeping or walking. Properly installed, Level-Rite Mounts meet OSHA standards for anchoring machinery.